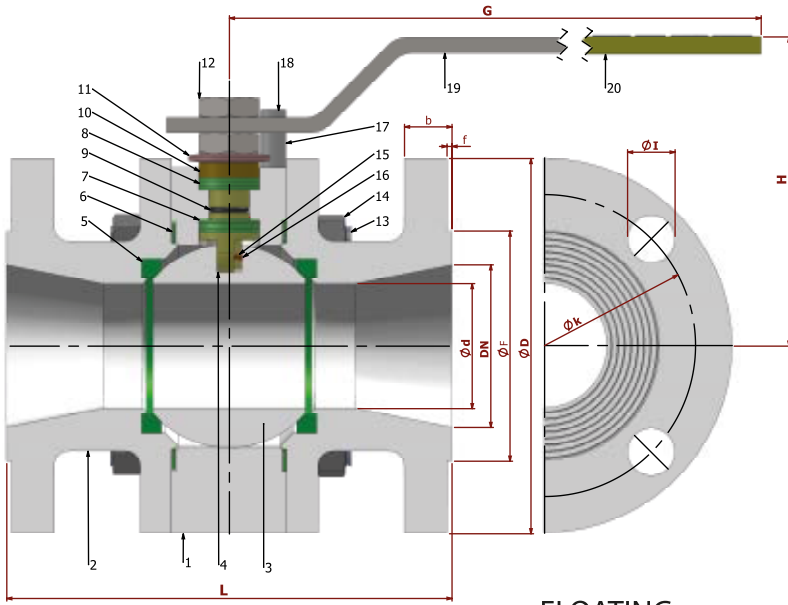



TIP TYPE
BKV-FL-RG
DN 15 - DN 300
CLASS 300 (PN 50)
ÇELİK
STELL
REDÜKSİYON GEÇİŞLİ / FLANŞLI
REDUCED BORE / FLANGED

FLOATING

TRUNNION

PARÇA NO ITEM NO	PARÇA ADI ITEM DISCRPTION	MALZEME MATERIAL	
24	ALT YATAK TEFLONU	PTFE-Teflon	PTFE-Teflon
23	ALT YATAK O-RING	VİTON	VİTON
22	ALT YATAK TEFLONU	PTFE-Teflon	PTFE-Teflon
21	ALT YATAK	ASTM A 105	1.4301.- 1.4401.
20	PLASTİK KAPLAMA	PVC	PVC
19	KÜRE HAREKET KOLU	st 37	1.4301.
18	CİVATA	ST 42 Gal.	1.4301.- 1.4401.
17	STOPLAMA PİMİ	ST 42 Gal.	1.4301.
16	ANTİSTATİK KÜRE	1.4301.	1.4301.- 1.4401.
15	ANTİSTATİK YAY	1.4301.	1.4301.- 1.4401.
14	SOMUN	5.6.	1.4301.- 1.4401.
13	SAPLAMA	4140 - 514t	1.4301.
12	KONTRA SOMUN	5,6 Gal.	1.4301.
11	ÇANAK PUL	50 Cr V 4	1.4301.
10	BASKI RİNGİ	MS 58	1.4301.- 1.4401.
9	MİL O-RİNC	VİTON	VİTON
8	BURGMAN GRAFİT O-RİNG	BURGMAN GRAPHITE O-RING	EN 1514-1
7	BOĞAZ SIZDIRMAZLIK TEFLONU	PTFE-Teflon	PTFE-Teflon
6	GÖVDE SIZDIRMAZLIK TEFLONU	PTFE-Teflon	PTFE-Teflon
5	KÜRE SIZDIRMAZLIK TEFLONU	PTFE-Teflon	PTFE-Teflon
4	HAREKET MİLİ	1.4021	1.4301.- 1.4401.
3	KÜRE	1.4301 / 1.4086	1.4305.- 1.4401.
2	KAPAK	A 216 WCB / A 105	1.4301.- 1.4401.
1	GÖVDE	A 216 WCB / A 105	1.4301.- 1.4401.

Dizayn Design : API 6D / ISO 14313
 Boyut Dimensions : ASME B 16.10
 Bağlantılar Connections : ASME B 16.5
 Çalışma Basıncı Working Pressure : CLASS 300 (PN 50)
 Çalışma Sıcaklığı Working Temperature : -29 °C / .+180 °C

Kullanım Alanları Usege Areas :
 Doğalgaz, LPG-LNG, Fuel-Oil, Basıncılı Hava ve Diğer Gazlar
 Natural Gas, LPG-LNG, Fuel-Oil, Pressurized Air and Other Gases etc.


BOYUT ve BAĞLANTI ÖLÇÜLERİ DIMENSIONS AND CONNECTION SIZES
CLASS 300 (PN 50)

	L	G	H	f	d	D	b	k	Hole Unit	I	F	Kg
DN 15 1/2"	140	150	75	2	12	95	14,3	66,7	4	15,7	35,1	
DN 20 3/4"	152	150	75	2	15	115	15,9	82,6	4	19,1	42,9	
DN 25 1"	165	150	83	2	20	125	17,5	88,9	4	19,1	50,8	
DN 32 1 1/4"	178	180	90	2	25	135	19,1	98,4	4	19,1	63,5	
DN 40 1 1/2"	190	230	95	2	32	155	20,7	114,3	4	22,4	73,2	
DN 50 2"	216	275	115	2	40	165	22,3	127	8	19,1	91,9	
DN 65 2 1/2"	241	275	120	2	50	190	25,4	149,2	8	22,4	104,6	
DN 80 3"	282	320	135	2	65	210	28,6	168,3	8	22,4	127	
DN 100 4"	305	380	150	2	80	255	31,8	200	8	22,4	157,2	
DN 125 5"	381	450	170	2	100	280	34,9	235	8	22,4	185,7	
DN 150 6"	403	450	200	2	125	320	36,6	269,9	12	22,4	215,9	
DN 200 8"	502	650	235	2	150	380	41,3	330,2	12	25,4	269,7	
DN 250 10"	568	900	270	2	200	445	47,7	387,4	16	28,4	323,8	
DN 300 12"	648	1100	370	2	250	520	50,8	450,8	16	31,8	381	