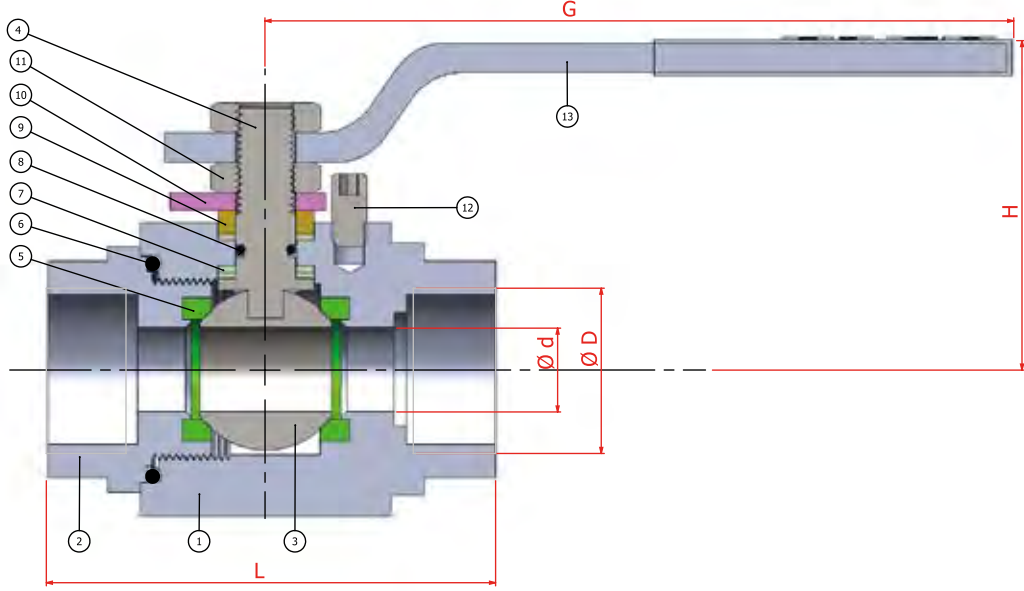


TİP TYPE
 BKV-Dİ-TG

DN 15 - DN 50

CLASS 800

 ÇELİK
 STEEL

 TAM GEÇİŞLİ / DİŞLİ
 FULL BORE / THREADED


PARÇA NO ITEM NO	PARÇA ADI ITEM DISCRPTION	MALZEME MATERIAL
13	KÜRE HAREKET KOLU BALL ACTION HANDLE	st 37 1.4301.
12	ÇİVATA BOLT	ST 42 Gal. 1.4301.- 1.4401.
11	KONTRA SOMUN COUNTER NUT	5,6 Gal. 1.4301.
10	STOPLAMA PULU STOPPING WASHER	St 37 1.4301.
9	BASKI RİNGİ PRESSURE RING	St 37 1.4301.- 1.4401.
8	MİL ÖRİNG SPINDLE O-RING	VİTON VİTON
7	BOĞAZ SIZDIRMAZLIK TEFLONU NECK TIGHTNESS ELEMENT	PTFE-Teflon PTFE-Teflon
6	GÖVDE SIZDIRMAZLIK ÖRİNG BODY TIGHTNESS O-RING	VİTON VİTON
5	KÜRE SIZDIRMAZLIK TEFLONU BALL TIGHTNESS ELEMENT	PTFE-Teflon PTFE-Teflon
4	HAREKET MİLİ ACTION SPINDLE	1,4021 1.4301.- 1.4401.
3	KÜRE BALL	1.4301 / 1.4086 1.4305.- 1.4401.
2	KAPAK COVER	A 105 1.4301.- 1.4401.
1	GÖVDE BODY	A 105 1.4301.- 1.4401.

Dizayn Design : API 6D / ISO 14313
 Boyut Dimensions : ASME B 16.10
 Bağlantılar Connections : ASME B 1.20.1
 Çalışma Basıncı Working Pressure : CLASS 800 Lbs (PN 55)
 Çalışma Sıcaklığı Working Temperature : -29°C / +180°C

Kullanım Alanları Usege Areas :
 Doğalgaz LPG-LNG, Fuel-Oil, Basıncılı Hava ve Diğer Gazlar
 Natural Gas, LPG-LNG, Fuel-Oil, Pressurized Air and Other Gases etc.


BOYUT ve BAĞLANTI ÖLÇÜLERİ DIMENSIONS AND CONNECTION SIZES
CLASS 800 (PN 55)

		L	G	H	d	D	t	Kg
DN 15	1/2"	75	125	55	15	1/2"	14	--
DN 20	3/4"	80	125	60	20	3/4"	17	--
DN 25	1"	90	135	80	25	1"	20	--
DN 32	1 1/4"	110	150	90	32	1 1/4"	22	--
DN 40	1 1/2"	120	185	100	40	1 1/2"	25	--
DN 50	2"	140	185	105	50	2"	28	--