


TİP TYPE  
BKV.3L-CEK-FL-RG

DN 15 - DN 150

PN 16 - PN 40

ÇELİK  
STELL

REDÜKSİYON GEÇİŞLİ / FLANŞLI  
REDUCED BORE / FLANGED

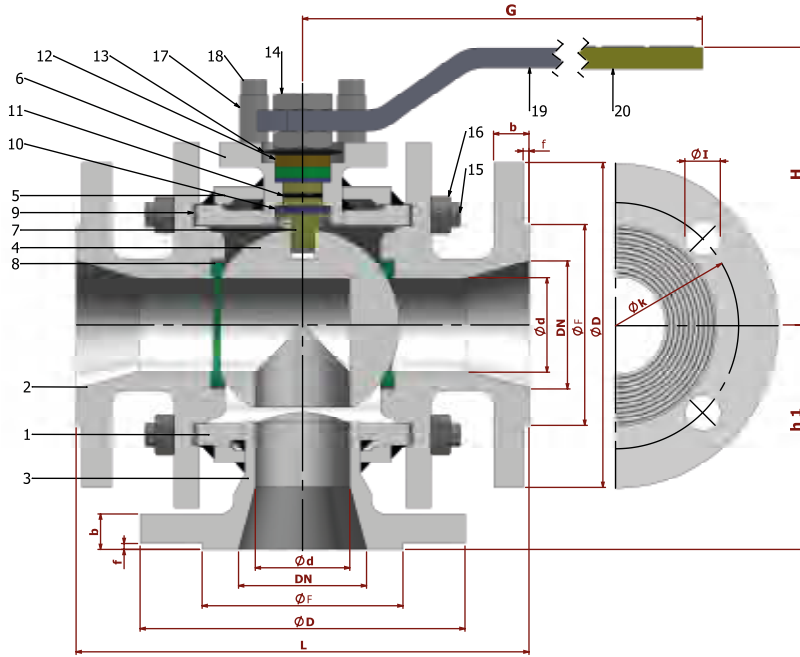

PARÇA NO ITEM NO	PARÇA ADI ITEM DISCRPTION	MALZEME MATERIAL		
20	PLASTİK KAPLAMA PLASTIC COVERING	PVC	PVC	
19	KÜRE HAREKET KOLU BALL ACTION HANDLE	st 37	1.4301.	
18	CİVATA BOLT	ST 42 Gal.	1.4301. - 1.4401.	
17	STOPLAMA PİMİ STOPPING PIM	ST 42 Gal.	1.4301.	
16	SOMUN NUT	5.6.	1.4301. - 1.4401.	
15	SAPLAMA STOPPING PIM	CK 35 / CK 45	1.4301.	
14	KONTRA SOMUN COUNTER NUT	5,6 Gal.	1.4301.	
13	ÇANAK PUL BOWL WASHER	50 Cr V 4	1.4301.	
12	BASKI RİNGİ PRESSURE RING	MS 58	1.4301. - 1.4401.	
11	MİL O-RİNG SPINDLE O-RING	VITON	VITON	
10	BOĞAZ SIZDIRMAZLIK TEFLONU NECK TIGHTNESS ELEMENT	PTFE-Teflon	PTFE-Teflon	
9	GÖVDE SIZDIRMAZLIK TEFLONU BODY TIGHTNESS ELEMENT	PTFE-Teflon	PTFE-Teflon	
8	KÜRE SIZDIRMAZLIK TEFLONU BALL TIGHTNESS ELEMENT	PTFE-Teflon	PTFE-Teflon	
7	HAREKET MİLİ ACTION SPINDLE	1,4021	1.4301. - 1.4401.	
6	BOĞAZ NECK	St 37-2	1.4301. - 1.4401.	
5	CEKET JACKET	St 44	1.4301. - 1.4401.	
4	KÜRE BALL	1.4301 / 1.4086	1.4305. - 1.4401.	
3	3 YOL KAPAK COVER 3 WAY	St 37-2	1.4301. - 1.4401.	
2	KAPAK COVER	St 37-2	1.4301. - 1.4401.	
1	GÖVDE BODY	A 216 WCB	1.4301. - 1.4401.	

Boyut Dimensions : EN 558  
Bağlantılar Connections : EN 1092 - 1  
Çalışma Basıncı Working Pressure : PN 16 - 40  
Çalışma Sıcaklığı Working Temperature : +180 °C

Kullanım Alanları Usege Areas :  
Asfalt, Gıda ve Kimya Sanayii  
Asphalt, Good ang Chemical Ind.



### BOYUT ve BAĞLANTI ÖLÇÜLERİ DIMENSIONS AND CONNECTION SIZES

DN	Hole Unit	L	G	H	h1	f	d	PN 16							PN 40						
								D	b	k	Hole Unit	I	F	Kg	D	b	k	Hole Unit	I	F	Kg
DN 15	1/2"	130	150	75	65	2	12	95	14	65	4	14	45	--	95	16	65	4	14	45	--
DN 20	3/4"	150	180	90	75	2	15	105	16	75	4	14	58	--	105	18	75	4	14	58	--
DN 25	1"	160	230	95	80	2	20	115	16	85	4	14	68	--	115	18	85	4	14	68	--
DN 32	1 1/4"	180	275	115	90	2	25	140	16	100	4	18	78	--	140	18	100	4	18	78	--
DN 40	1 1/2"	200	275	120	100	3	32	150	16	110	4	18	88	--	150	18	110	4	18	88	--
DN 50	2"	230	320	135	115	3	40	165	18	125	4	18	102	--	165	20	125	4	18	102	--
DN 65	2 1/2"	290	380	150	145	3	50	185	18	145	4	18	122	--	185	22	145	8	18	122	--
DN 80	3"	310	450	170	170	3	65	200	20	160	8	18	138	--	200	24	160	8	18	138	--
DN 100	4"	350	450	200	175	3	80	220	20	180	8	18	158	--	235	24	190	8	22	162	--
DN 125	5"	400	650	235	200	3	100	250	22	210	8	18	188	--	270	26	220	8	26	188	--
DN 150	6"	450	900	270	270	3	125	285	22	240	8	22	212	--	300	28	250	8	26	218	--